


CANOPY

Parts List 15' x 15'



1. SPREAD OUT TENT AND ROPES. DRIVE STAKES 4 FT. OUT FROM EDGE OF TENT. TWO AT EACH CORNER, ONE AT EACH SIDE POLE POSITION.
2. FASTEN ROPES TO STAKES LEAVING LOOPED END AND ABOUT 7 FT. OF SLACK.
3. SET UP TWO PIECE SIDE POLES WITH TIPS THROUGH GROMMETS. ANGLE POLES AT ABOUT 45 DEGREES. (SEE 3A)
NOTE: ALL GUY ROPES MUST BE OVER POLE TIPS.
4. SET UP CENTER POLES. BE CERTAIN SNAP BUTTONS ARE SECURED.
5. INSERT STAKES NEAR THE CENTER POLE.
6. PUSH SIDE POLES TO VERTICAL. ADJUST AND TIGHTEN GUY ROPES. (SEE 6A & 6B)
7. TIE CENTER TETHER ROPE TO POLE. (SEE 7)
8. SMALL DIAMETER CORD IS ATTACHED TO CENTER RINGS AND STAKED STRAIGHT DOWN. (SEE 8)
9. WHEN TAKING DOWN TENT, MAKE SURE ALL TAPE OR TAPE RESIDUE IS REMOVED BEFORE ROLLING UP.

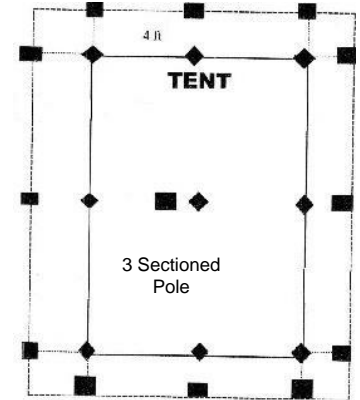

3 A



6 A



6B



7



8

- PARTS LIST** (15 X 15 CANOPY)
- 9 SIDE/END POLES (19 SECTIONS)
 - 13 STAKES

\$75.00 CLEANING FEE IF WET OR DIRTY!

